


**Spectral Response**

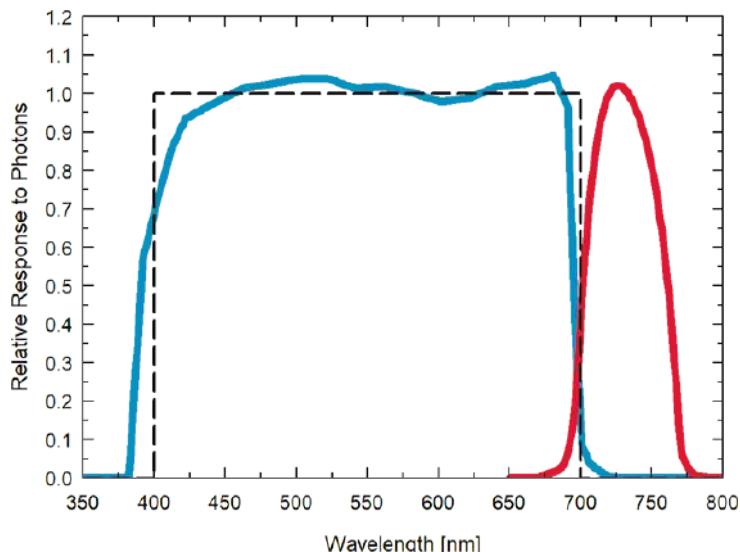

Spectral response of **PAR detector (blue)** and **Far-red detector (red)** compared to defined response of plants to radiation (dashed).


**Product Specifications**

	S2-141-SS	S2-441-SS	S2-442-SS
Power Supply	Self-powered	5.5 to 24 V DC	
Current Draw	—	1.4 mA (quiescent), 1.8 mA (active)	RS-232 37 mA; RS-485 quiescent 37 mA, active 42 mA
Output (sensitivity)	0.01 mV per $\mu\text{mol m}^{-2} \text{s}^{-1}$ (PAR) 0.03 mV per $\mu\text{mol m}^{-2} \text{s}^{-1}$ (Far-red) [typical values, variable from sensor to sensor]	—	—
Calibration Factor (reciprocal of sensitivity)	60 $\mu\text{mol m}^{-2} \text{s}^{-1}$ per mV (PAR) 40 $\mu\text{mol m}^{-2} \text{s}^{-1}$ per mV (Far-red) [typical values, variable from sensor to sensor]	Custom for each sensor and stored in firmware	
Calibration Uncertainty	± 5 %	—	—
Output Range	0 to 67 mV (PAR) 0 to 25 mV (Far-red)	SDI-12	Modbus
Measurement Repeatability	—	Less than 1 %	—
Long-term Drift	—	Less than 2 % per year	—
Non-linearity	—	Less than 1 % (up to 4000 $\mu\text{mol m}^{-2} \text{s}^{-1}$ ) (PAR) Less than 1 % (up to 1000 $\mu\text{mol m}^{-2} \text{s}^{-1}$ ) (Far-red)	—
Response Time	Less than 1 ms	Less than 0.6 s	—
Field of View	—	180°	—
Spectral Ranges (see graph)	—	389 to 692 nm ± 5 nm (PAR) 700 to 750 nm ± 5 nm (Far-red)	—
Directional (Cosine) Response	—	± 2 % at 45°; ± 5 % at 75° zenith angle	—
Temperature Response	—	Less than 0.1 % per C	—
Housing	—	Anodized aluminum body with acrylic diffuser	—
IP Rating	—	IP68	—
Operating Environment	—	-40 to 70 C; 0 to 100 % relative humidity	—
Dimensions	—	30.5 mm diameter, 37 mm height	—
Mass (with 5 m of cable)	—	140 g	—
Warranty	—	4 years against defects in materials and workmanship	—

## Overview

The new Apogee PAR-FAR sensor is a research-grade tool for measuring both the traditional PPFD photosynthetic photon flux and separately quantifying the photon flux of far-red photons (700-760 nm). The outputs include the traditional quantum flux, the far-red photon flux, and the far-red fraction (far-red photon flux density / sum of PPFD and far-red photon flux density). This sensor quantifies far-red photons, and for many applications it reduces the need for a more complex measurement with a spectroradiometer.

## Dimensions

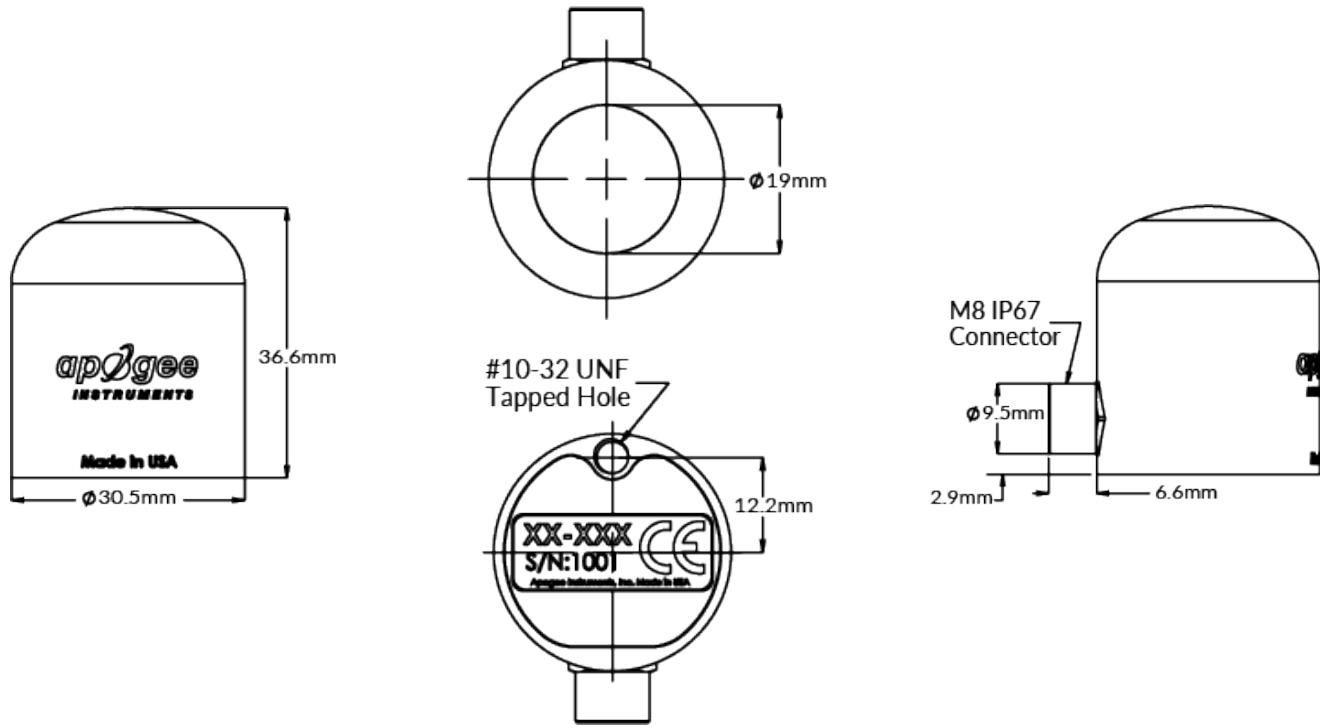

## Features

### TYPICAL APPLICATIONS

- Monitoring plant light environments
- Research plant morphogenic activity
- Photobiology studies

### KEY FEATURES

Digital SDI-12 output is standard with analog and Modbus options available. A domed diffuser promotes self-cleaning to minimize errors from dust and debris.

### HIGH QUALITY CABLE

Pigtail-lead sensors feature IP68, marine-grade stainless-steel cable connectors attached directly to the sensor head to simplify sensor removal for maintenance and recalibration.

